

★HOUR 502 03-021924/03 ★JF04048252-A  
 Inspection of completeness of membrane filter - from coefft. of redn.  
 of gas pressure of dammed upstream side of filter

HOUSE SHOKUHN KOGYO KK 91.01.16 91JP-003154


J01 (92.12.03) G01N 15/08, B01D 65/10, G01N 15/08

The microholes of a membrane filter are filled with fluid. When the microhole is complete, the upper stream side of a filter is dammed up so that gas pressure on the inflow side which is not against the surface tension of fluid with which the microholes are filled, is applied. From the coefft. of reduction of the gas pressure of a part dammed up for a given time, the completeness of a filter is ascertained. A part in the rear of the filter is inspected in a sterile state in which gas pressure on the outflow side held at a value higher than the normal pressure and lower than the gas pressure of the dammed up part, is applied.

ADVANTAGE - Method is accurate. (5pp Dwg.No.1/2)

N83-016829

803-F06B

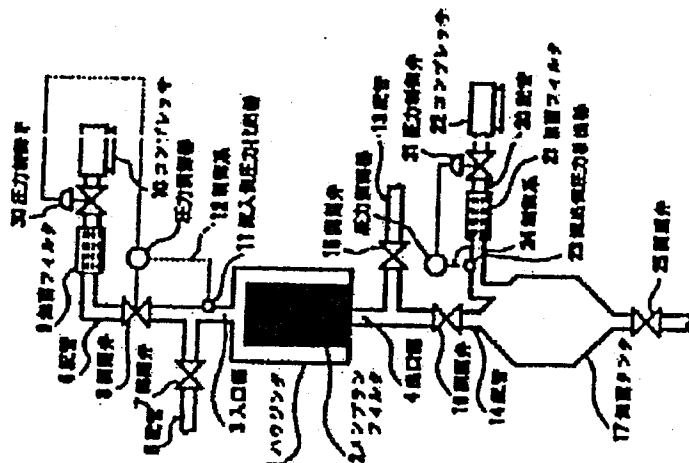

© 1993 DERWENT PUBLICATIONS LTD.

128, Theobalds Road, London WC1X 8RP, England

US Office: Derwent Inc., 1313 Dolley Madison Boulevard,

Suite 401 McLean, VA22101, USA

Unauthorised copying of this abstract not permitted.